



JK Series




Video Sentry with Digital Pan/Tilt and Zoom
1 entry and 2 stations



**Compact Handsfree Colour
Audio Video Entry Security Intercom**

JK Series Video Intercom

Video Handsfree Colour

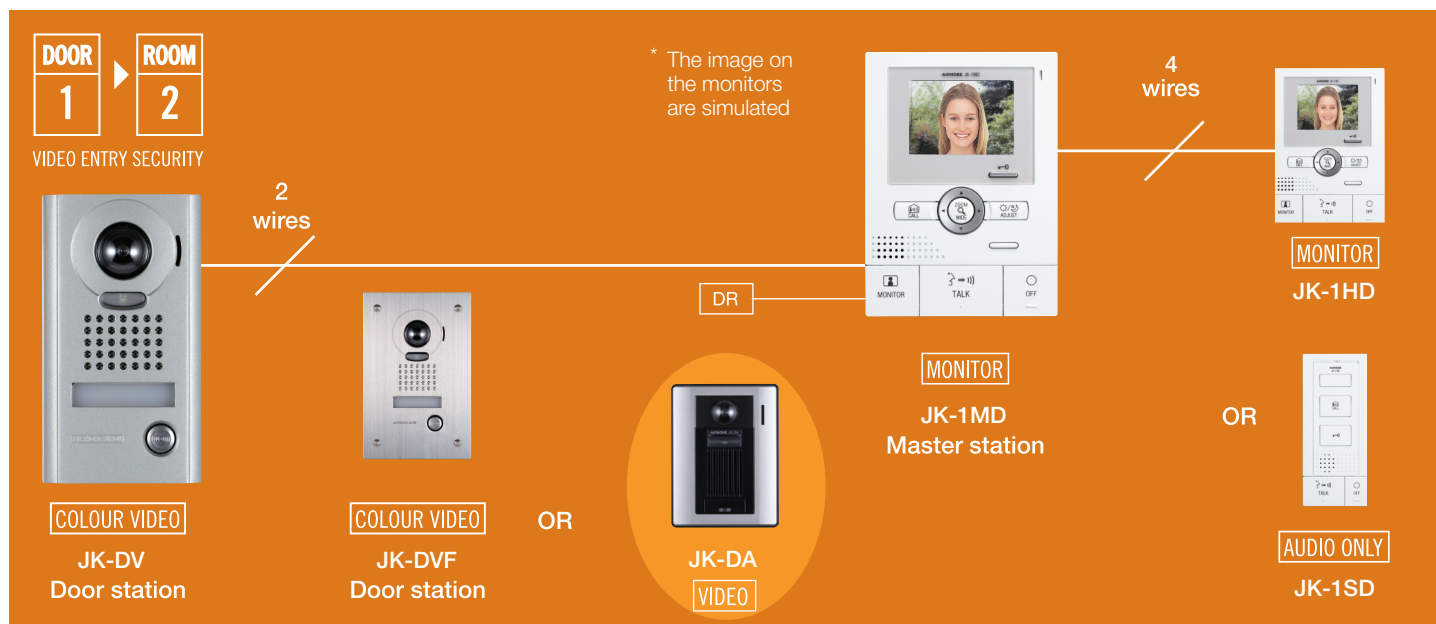

Features

- 1 video door station and up to two internal stations
- 170° Wide Angle view
- Digital zoom with pan and tilt function
- Clear crisp colour image with 90mm TFT colour LCD
- Handsfree communications to door station
- All call internal communication
- Choice of 3 door stations including vandal resistant flush and surface mount models
- Day / Night adjust
- White LED illumination for low light viewing
- Entrance Monitoring
- External sensor input
- Optional switch (requires additional wiring)

Cables

1.00mm poly jacketed PE (polyethylene) (KBWIRE) insulation cable should be used. If PVC cable is used, maximum distance from door to farthest monitor is 30m. PVC cable must not be used underground.

Wiring

Wiring must be daisy chained between stations not homerun.

Specification

| | |
|--------------------------------|--|
| Power Source | 18 volts DC 18VDC1300 Two Monitors |
| Video Monitor | 3 1/2" TFT Colour LCD |
| Call-in | Chime, image and Audio |
| Night viewing | White light projected up to 30cm, from camera. Background scene beyond 30cm, cannot be seen. |
| Door Release | 24V AC/DC 500mA contact rating |
| Wiring | 2 parallel wires to door 4 wires in loop between rooms |
| Distance | 1.00mm dia PE |
| Door to master | 100m |
| Master to farthest sub | 100m |
| Master station to Power supply | 10m |

Additional Options

| | |
|-------|--|
| IER-2 | Call extension unit |
| EL12S | Door strike |
| JKWBA | Long distance adaptor |
| AC10S | Access control unit (surface mount) |
| AC10F | Access control unit (flush mount) |
| AC10U | Access control unit (module only). Requires custom mounting plate) |

Ver: AI128

Your local Aiphone reseller:

